



A Tech Authority, Inc
3857 Schaefer Ave, Ste C
Chino, CA. 91710
(909)972-7520
www.atechauthority.com

HEIDENHAIN

SALES & SERVICE:

A Tech Authority, Inc.
13745 Stockton Ave.
Chino CA 91710
909-614-4522
sales@atechauthority.com



Product Information

LC 481

LC 491

Absolute Linear Encoders

LC 481/LC 491

- Absolute linear encoder
- High positioning accuracy and traversing speed through single-field scanning
- For limited installation space

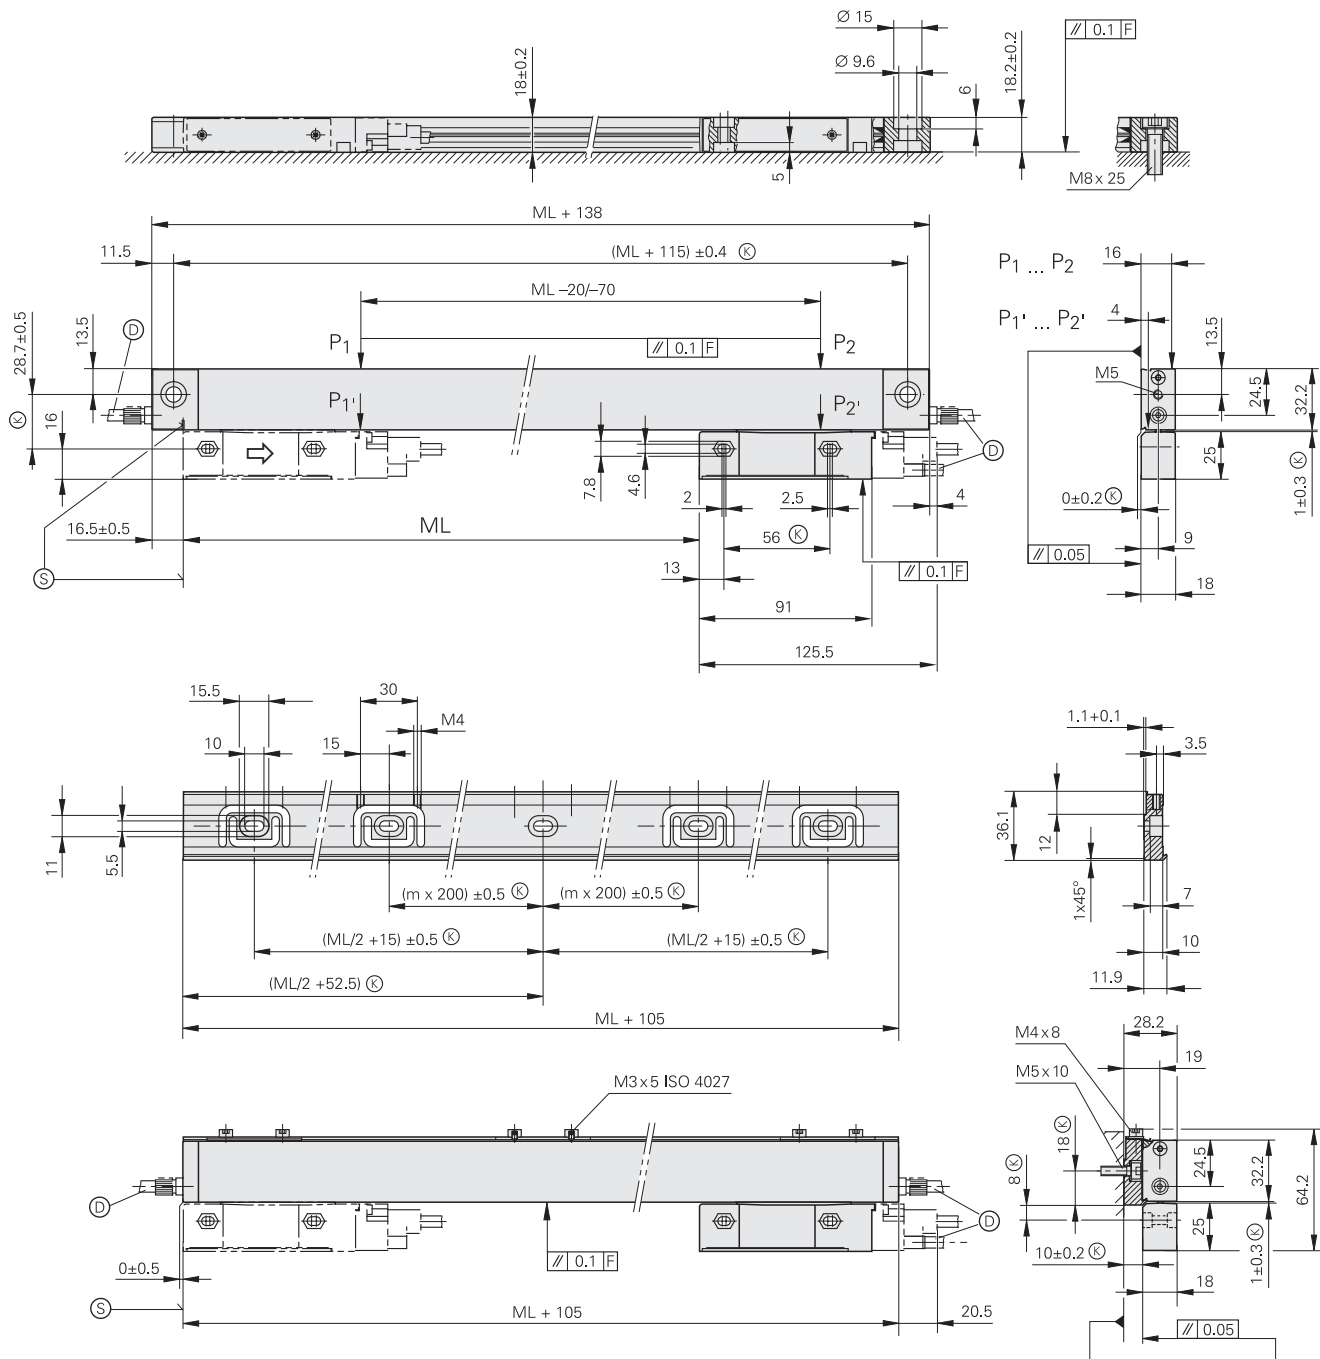
Dimensions in mm



Tolerancing ISO 8015

ISO 2768 - m H

< 6 mm: ± 0.2 mm



- ① = Without mounting spar
- ② = With mounting spar
- F = Machine guideway
- P = Gauging points for alignment
- ⊗ = Required mating dimensions
- ⊙ = Compressed air inlet
- Ⓜ = Beginning of measuring length (ML)
- ⇒ = Direction of scanning unit motion for output signals in accordance with interface description




Mounting spar

ML	m
70 ... 520	0
570 ... 920	1
1020 ... 1340	2
1440 ... 1740	3
1840 ... 2040	4

Specifications	LC 481					LC 491F			LC 491M			
Measuring standard Thermal expansion coefficient	DIADUR glass scale with absolute track and incremental track <i>Without mounting spar:</i> approx. $8 \cdot 10^{-6} \text{ K}^{-1}$, <i>with mounting spar:</i> approx. $9 \cdot 10^{-6} \text{ K}^{-1}$											
Accuracy grade*	$\pm 3 \text{ }\mu\text{m}$, $\pm 5 \text{ }\mu\text{m}$											
Measuring length ML* in mm Mounting spar recommended	70 720	120 770	170 820	220 920	270 1020	320 1140	370 1240	420	470	520	570	620
Only with mounting spar	1340	1440	1540	1640	1740	1840	2040					
Absolute position values	EnDat 2.1					Fanuc 01 serial interface			Mitsubishi High Speed Serial Interface			
Measuring step	Approx. $0.02 \text{ }\mu\text{m}^{1)}$					<i>Accuracy $\pm 3 \text{ }\mu\text{m}$:</i> $0.01 \text{ }\mu\text{m}$, <i>accuracy $\pm 5 \text{ }\mu\text{m}$:</i> $0.05 \text{ }\mu\text{m}$						
Calculation time t_{cal}	< 1 ms					–						
Incremental signals Grating period/signal period Cutoff frequency –3dB	$\sim 1 \text{ V}_{\text{PP}}$ $20 \text{ }\mu\text{m}$ $\geq 150 \text{ kHz}$					–						
Power supply	5 V $\pm$ 5% / < 300 mA without load. Remote sensing is possible											
Electrical connection Max. cable length	Separate adapter cable (1 m/3 m/6 m/9 m) connectable to mounting block Upon request											
Traversing speed	$\leq 180 \text{ m/min}$											
Required moving force	$\leq 5 \text{ N}$											
Vibration 55 to 2000 Hz Shock 11 ms Acceleration in measuring direction	<i>Without mounting spar:</i> $\leq 100 \text{ m/s}^2$ (IEC 60 068-2-6) <i>With mounting spar:</i> $\leq 200 \text{ m/s}^2$ (IEC 60 068-2-6) $\leq 300 \text{ m/s}^2$ (IEC 60 068-2-27) $\leq 100 \text{ m/s}^2$											
Operating temperature	0 to 50 °C											
Protection IEC 60 529	IP 53 when installed acc. to mounting instructions, IP 64 with compressed air from DA 300											
Weight	<i>Encoder:</i> 0.2 kg + 0.5 kg/m measuring length, <i>mounting spar:</i> 0.9 kg/m											



* Please indicate when ordering



¹⁾ After 1024-fold interpolation of the incremental signals

Connecting Elements and Cables	LC 481	LC 491F	LC 491M
Adapter cable complete With M23 coupling (male), 17-pin Cable length 1 m/3 m/6 m/9 m Cable diameter 6 mm	Id. Nr. 369 129-xx 	Id. Nr. 337 439-xx 	
Connecting cable complete With M23 connector (female), 17-pin Cable diameter 8 mm	With D-sub connector (female) Id. Nr. 332 115-xx 	With Fanuc connector Id. Nr. 534 855-xx 	With Mitsubishi connector Id. Nr. 344 625-xx 
Connecting cable with one connector With M23 connector (female) Cable diameter 8 mm	Id. Nr. 309 778-xx 	–	
Adapter cable complete Cable diameter 6 mm	With D-sub connector (female) Id. Nr. 370 474-xx 	With Fanuc connector Id. Nr. 532 759-xx 	With Mitsubishi connector Id. Nr. 367 425-xx 

Electrical Connection



LC 481
17-pin coupling M23





15-pin D-sub connector, female, for HEIDENHAIN controls and IK 220


	Power supply					Incremental signals				Absolute position values			
	7	1	10	4	11	15	16	12	13	14	17	8	9
	1	9	2	11	13	3	4	6	7	5	8	14	15
	U _P	Sensor U _P	0V	Sensor 0V	Inside shield	A+	A-	B+	B-	DATA	DATA	CLOCK	CLOCK
	Brown/Green	Blue	White/Green	White	/	Green/Black	Yellow/Black	Blue/Black	Red/Black	Gray	Pink	Violet	Yellow



LC 491F
20-pin Fanuc connector





17-pin coupling M23


	Power supply					Absolute position values							
	9	18/20	12	14	16	1	2	5	6				
	7	1	10	4	–	14	17	8	9				
	U _P	Sensor U _P	0V	Sensor 0V	Shield	Serial Data	Serial Data	Request	Request				
	Brown/Green	Blue	White/Green	White	–	Gray	Pink	Violet	Yellow				

LC 491M
20-pin Mitsubishi connector



17-pin coupling M23


	Power supply					Absolute position values							
	20	19	1	11	6	16	7	17					
	7	1	10	4	14	17	8	9					
	U _P	Sensor U _P	0V	Sensor 0V	Serial Data	Serial Data	Request Frame	Request Frame					
	Brown/Green	Blue	White/Green	White	Gray	Pink	Violet	Yellow					

Shield on housing; **U_P** = power supply voltage
Sensor: The sensor line is connected internally with the corresponding power line
Vacant pins or wires must not be used!

HEIDENHAIN

DR. JOHANNES HEIDENHAIN GmbH
Dr.-Johannes-Heidenhain-Straße 5
83301 Traunreut, Germany
☎ +49 (8669) 31-0
☎ +49 (8669) 5061
e-mail: info@heidenhain.de

www.heidenhain.de

SALES & SERVICE:
A Tech Authority, Inc.
13745 Stockton Ave.
Chino CA 91710
909-614-4522
sales@atechauthority.com